

PV Supernode - Quick Start Guide

Set contains:

- PV Supernode device
- 12V DC power supply
- GSM antenna (optional)
- WiFi antenna (optional)

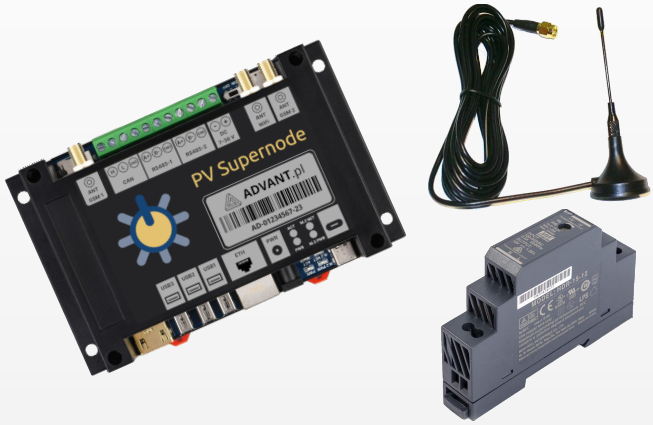

First run

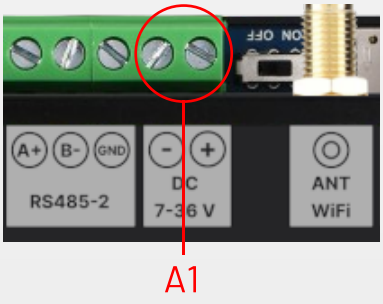

A1



A2


Power connection:

- Unpack the kit components
- Connect the cable to the power supply (A2), then to the screw connectors (A1) (V+ to DC+, V- to DC-)
- Connect the power supply to 230 V AC

RS485 communication connection:

- Connect the RS485 cable to the screw connectors (B) and then to the inverter or analyzer (A+ to A+, B- to B-)

* inverter and analyzer are not included in the delivery

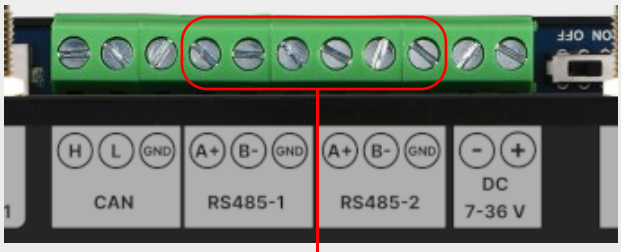

B



C

Podłączenie do Internetu:

- Prepare an Ethernet cable of appropriate length (not included)
- Connect the cable to the Ethernet socket (C) and to the switch/router of the local computer network
- The device will acquire network IP settings using DHCP and then establish communication with the manufacturer's access server through an encrypted OpenVPN channel

Advant Sp. z o.o. 80-398 Gdańsk
Obrońców Wybrzeża 9/4
email address: info@pvcomplex.pl
phone number: +48 737 88 43 77

KRS: 0000403621
NIP: 5842725373
Regon: 221572320